

# **HOT SHOT**

## **810-TRANSCEIVER INSTALLATION GUIDE**

*Pg.*

<b>2</b>	<b>HOW IT WORKS</b>
<b>2</b>	<b>CODE SWITCH SETTINGS</b>
<b>2</b>	<b>CABINET MOUNTING</b>
<b>3</b>	<b>TRANSMITT FUNCTION SWITCH SETTINGS</b>
<b>3</b>	<b>RECEIVER MODE SWITCH SETTING</b>
<b>3</b>	<b>INDICATOR LEDS</b>
<b>3</b>	<b>BATTERY BACKUP</b>
<b>4</b>	<b>OPERTING TEST BEACON</b>

Hot Shot Systems Inc. will no longer sell or warranty its products for the use in controlling or monitoring pollutants. However, the use of these controllers in non pollutant applications such as water tanks, water pumps, pivots, irrigation systems and any other monitoring or control applications that do not involve pollutants are suitable for these products.

Version : 161808

**ATTENTION:** All Hot Shot units have a designated GROUND Terminal. Hot Shot units must have there ground terminal connected to a proper ground or grounding system as per the NEC (*National Electrical Code*) and or your local and state electrical code guidelines.

**CAUTION:** Never connect any voltage to the HOT SHOT Relay Input terminals. The Hot Shot supplies the voltage needed for sensor switching (use dry relay contacts only). Make sure the float or sensor terminals do not have voltage from previously wired configurations.

**ATTENTION:** Depending upon the style of system that your are going to control with the Hot Shot Wireless Controller you may need to supply additional parts. Such as relays, step-down transformers, Murphy switches etc.



### HOW IT WORKS

Think of the HOT SHOT system as a control wire going from the transmitter site to the receiver site. When the Hot Shot Transmitter's SENSOR Input is connected to COM, a 10 second delay timer is started. After the delay timer has expired, the transmitter will send the (Relay ON) command to the receiver. This will close the relay contacts between N.O. and COM on the Receiver that it is controlling. Now when the SENSOR Input at the transmitter is opened from the COM it will send the (Relay OFF) command to the receiver switching the relay back to N.C. connected to COM. Sensor 1 controls Relay 1 on the Receivers, Sensor 2 controls Relay 2 on the Receivers and Sensor 3 controls Relay 3 on the Receivers. Battery backup in the transmitter will still allow the HOT SHOT to work in case of power outage. Each system is coded with its own four digit code so it will not interfere with other systems in the same area.

**For more detailed wiring and operating instructions please call Hot Shot Systems Tech Support at 785-623-1500.**

### MOUNTING

Cabinets are a weatherproof UV protected NEMA 4X cabinet with mounting ears on top and bottom. The transmitter/receiver control box can be mounted on the side of a control panel, pole or any other surface as long as the antenna does not have metal running within 12" of the antenna whip. If longer range is needed, an external long range antenna can be used. Do not mount the HOT SHOT receiver to the pump engine or cover because the strong vibrations can be harmful to the unit.

### BATTERY BACKUP

During a power outage, a gel cell rechargeable battery will supply power to the transmitter for approximately 24 hours. This will allow the transmitter to send a shutdown signal to the receivers when there is a loss of power. The Hot Shot Transmitter comes with a battery saver feature that will turn off the Hot Shot Transmitter if the voltage drops from 12vdc to 10vdc. This function will add years of life to the gel cell battery.

**Important... When the battery has discharged, it will take approximately 15 to 20 minutes for the battery to charge enough to operate the transmitter in case of another power failure. The battery should be replaced every year for the best reliability during power outages. Call 785-623-1500 for replacement batteries.**

## CODE SWITCH SETTINGS

All transmitters and receivers will be shipped from the factory with preprogrammed 4 digit system codes. This ensures that your neighbor will not duplicate the same system code as your units. Your transmitter and receiver system codes should already match, so you do not need to program any codes. If a new secure system code is needed for your installation please call 785-623-1500 to be issued a secure system code for your area that the system will be operating in.

If you ever need to replace a unit due to servicing, the field code can be programmed to match the existing or new add on units. FOLLOW THE EXAMPLE BELOW...

**FOR CODE QUESTIONS? CALL 785-623-1500**

**EXAMPLE: CODE 6789**

**KEY**

3	4	5	6
7	8	9	0

Use the # KEY to the left to make each digit of the code. It takes three of the switches to make one number of the code.

Use switches 1,2,3 for the first # in the code. Switches 4,5,6 for the second #. Switches 7,8,9 for the third #. Switches 10,11,12 for the fourth #.

To watch a "How To" video on this feature click on the link below:

["CODE SWITCH SETTINGS"](#)

**TRANSMITT FUNCTION SWITCHES**

To activate a function slide the dipswitch up to the on position.

**SWITCH#**



<b>1</b>	SENSOR 1 BYPASS SWITCH <i>(Turn on if this sensor is not used.)</i>
<b>2</b>	SENSOR 2 BYPASS SWITCH <i>(Turn on if this sensor is not used.)</i>
<b>3</b>	SENSOR 3 BYPASS SWITCH <i>(Turn on if this sensor is not used.)</i>
<b>5</b>	<b>ON</b> Changes Sensors 1, 2, 3 into Sensors 4, 5, 6.
<b>8</b>	TEST BEACON <i>(Used for testing and range finding only.)</i>
	<b>See directions on the next page.</b>
<b>9</b>	REFRESH <i>(This function will re-transmit the state of the transmitter's sensors once every 30 to 40 min.)</i>

(EXAMPLE: BELOW SHOWS HOW TO BYPASS SENSOR 2 AND SENSOR 3 FOR WHEN THEY ARE NOT BEING USED)

FUNCTION SWITCHES

TURN <b>ON</b> TO BYPASS A SENSOR ↑	1	2	3	4	5	6	7	8	9
	S	S	S	S	S	S	S	S	S
	E	E	E	E	E	E	E	E	E
	N	N	N	N	N	N	N	N	N
	S	S	S	S	S	S	S	S	S
	O	O	O	O	O	O	O	O	O
	R	R	R	R	R	R	R	R	R
	1	2	3	1	2	3	1	2	3

## INDICATOR LEDS



**POWER** Indicates that the Transceiv-

**TRANSMITT** Indicates when the Transceiver is transmitting.


**STROBE** LED flashes once for each of the four correct digits of the code received. When used for troubleshooting this LED will stay on steady for one second if an incorrect digit of the code is received. *Example: If the LED flashes two times and then goes on steady it is indicating that the third digit doesn't match. If the LED flashes one time and goes on steady it is indicating that the second digit doesn't match. If the LED comes on steady right away it is indicating that the first digit doesn't match.*

**BUSY** Indicates when the radio is receiving a signal.

**RELAY LEDS** When these LED's are on it indicates that its corresponding transmitter has activated the relay.

## OPERATING THE TEST BEACON

The Test Beacon function is turned on and off by using FUNCTION SWITCH #8 (see above). **This feature is used for testing and range finding purposes only.** To activate the Test Beacon first turn OFF the power to the transmitter. Turn function switch #8 on and connect a small jumper wire from the **SENSOR INPUT** terminal to the **COMMON** terminal and then turn the power back ON to the transmitter. *See picture to the right.* When

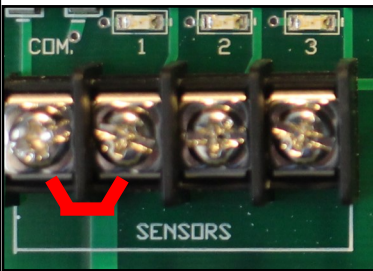


turned ON the Transmitting Light will blink and the code will be transmitted every 10 seconds cycling the remote receiver's relay. Testing a receiver that is either a #2 receiver or a #3 receiver is done the same as above except that you connect the jumper wire to the corresponding **SENSOR** input and **COMMON**. **DO NOT have the remote receiver wired up to the pump** during this procedure because it will continually open the relay for 10 seconds and then close the relay for 10 seconds causing damage to the pump. **Function switch #8 must be turned OFF and the jumper wire removed for the transmitter to operate normally.**

To watch a "How To" video on this feature click on the link below:

["OPERATING THE TEST BEACON"](#)

## RECEIVE MODE SWITCH SETTING



**RECEIVE  
MODE# SWITCHES**


**SWITCH# 4** ALLOWS RELAYS TO BE CONTROLLED BY A TRANSMITTER USING INPUT SENSORS 4, 5 AND 6.

# HOT SHOT GROUNDING FOR SAFETY AND PEAK PERFORMANCE

Hot Shot wireless systems are equipped with a GROUND terminal that needs to be connected to an NEC approved ground rod. A Hot Shot has various lightning and static protection devices incorporated on the circuit board that require proper grounding to operate. Any equipment or device panels operating with or near the Hot Shot should also be connected to the grounding system. A good ground will enhance the transmit and receive range of the Hot Shot System.

To watch a "How To" video on this feature click on the link below:

["PROPER GROUNDING"](#)

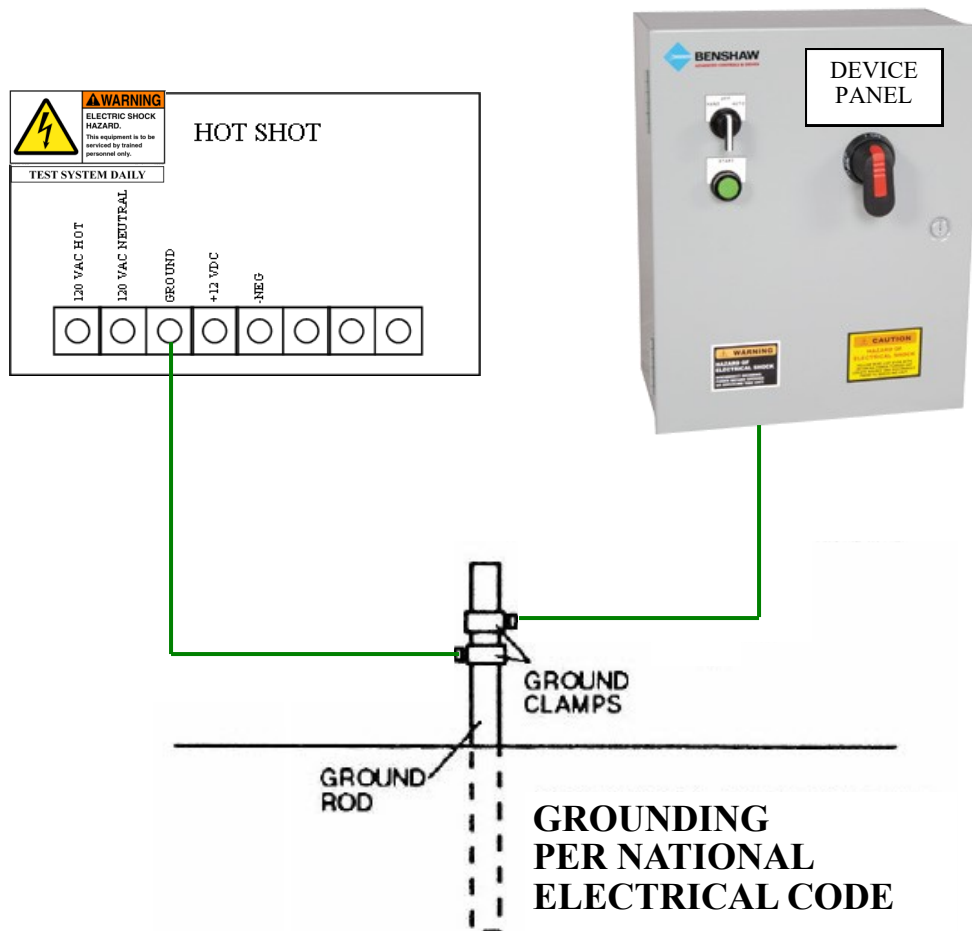

## Warranty

**The warranty below constitutes the only warranty in connection with any sale from Hot Shot Systems Inc. and is in lieu of all other warranties, express or implied, written or oral. THERE ARE NO IMPLIED WARRANTIES OF MERCHANT-ABILITY OR FITNESS FOR A PARTICULAR PURPOSE THAT APPLY TO ANY SALE FROM HOT SHOT SYSTEMS INC.**

Hot Shot Systems Inc., warrants to You that Products (Products meaning any item purchased from Hot Shot Systems) will be free from defects in materials and workmanship under normal use and service for one (1) year from the purchase date. A product issue under this Limited Warranty must be presented during the Limited Warranty period and within thirty (30) days after any covered condition has occurred. A claim under this Limited Warranty shall be satisfied by either, in Hot Shot Systems sole discretion, repairing or replacing the Product. Replacement Products may be new or reconditioned.

To make a claim under this Limited Warranty, Hot Shot Systems must first issue You a Returned Material Authorization (RMA) number. This number can be obtained by calling Hot Shot Systems and a RMA number will be provided over the phone. A copy of the RMA number must be included with any materials shipped to Hot Shot Systems. The entirety of Products must be sent back to Hot Shot Systems and properly packaged to ensure against damage during shipping. If Hot Shot Systems determines that the claim is covered by this Limited Warranty, Hot Shot Systems will either, in its sole discretion, repair or replace the Products and/or part. Any damages not covered under this Limited Warranty will not be repaired until a purchase order is received.

The Limited Warranty period shall not be extended by the replacement or repair of Products or parts under this Limited Warranty but the remaining Limited Warranty period shall continue in effect and be applicable to the replaced or repaired Products or parts under conditions of the Limited Warranty.

The term "Long Range Wireless Control" is not a guarantee of proper radio operation everywhere in all conditions. Radio operation is subject to transmission and receive limitations, customer equipment, weather, topography and other environmental and electrical considerations associated with radio technology also affect radio operation and radio operation may vary significantly within buildings. The radio operation range of Products is not guaranteed, and Hot Shot Systems cannot and does not guarantee or represent that the radio operation will operate correctly in all conditions. It is Your responsibility to determine daily if radio operation is operating correctly and to monitor the Products to determine the communication between Products. You should contact Hot Shot Systems for assistance if needed. As such, Hot Shot Systems is not liable for any causes of action, pollution, incurred costs, losses of any kind or damages of any kind whatsoever arising out of mistakes, omissions, interruptions, errors, customer equipment or defects in the radio operation and or Products.

Intended Use. Products are intended for non pollutant, non hazardous and non critical use only. Products are to be used and installed per the installation guide and any other instructions provided by Hot Shot Systems (collectively, the "Seller's Guidelines"). Any use beyond the intended non pollutant, non-hazardous and non critical use or against the Seller's Guidelines ("Unintended use") are at the End-User's own risk, and Hot Shot Systems does not warrant or make any representations whatsoever regarding the use of Products for any unintended use. Hot Shot Systems' Products are convenience items and are not intended to be a substitute for normal maintenance, monitoring, control and proper upkeep of equipment or property that Products are monitoring or controlling. Hot Shot Systems' Products are convenience items and are not intended to monitor equipment, control equipment, liquids, chemicals or other items which are pollutants, vital, hazardous, necessary, and/or have life-or-death consequences. The End-User should take care to determine prior to use whether Products are suitable, adequate or safe for the use intended. Since individual applications are subject to great variation, Hot Shot Systems makes no representation or warranty as to suitability or fitness of Products for any specific application.

Upon expiration of the Limited Warranty period, all liability of Hot Shot Systems shall be terminated. This Limited Warranty will also be terminated immediate due to any of the following cases: failure to follow installation and operating instructions, misuse or "Unintended use", alteration, abuse, accident or tampering, and repair by anyone other than Hot Shot Systems.

**THIS LIMITED WARRANTY IS EXCLUSIVE AND EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, OBLIGATIONS OR LIABILITIES, WHETHER WRITTEN, ORAL, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANT-ABILITY OR FITNESS FOR A PARTICULAR PURPOSE, OR OTHERWISE. IN NO CASE SHALL HOT SHOT SYSTEMS BE LIABLE TO ANYONE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS WARRANTY OR ANY OTHER WARRANTIES WHATSOEVER. This Limited Warranty gives specific legal rights.**

No employee, agent, dealer or other person is authorized to give any warranties on behalf of Hot Shot Systems Inc., nor to assume for it any other liability in connection with any of its products, except an officer of Hot Shot Systems Inc., in a signed writing.

### LIABILITY

Hot Shot Systems Inc. and its directors, officers, employees, subsidiaries and affiliates shall not be liable for pollution, pollution clean up, personal injury, property damage, hazardous conditions created, fluid spill cleanup, loss of product, loss of profit, or any other loss or expenses based on a claim the product(s) failed to operate properly. Test product daily to see if any malfunctions are present. If using this product in a situation where it is extremely critical to control your device to prevent damage of any kind, you must also use a call out system to notify a person in control of this situation. If this warranty and statement of liability is unacceptable, then do not purchase these products.

Hot Shot Systems makes no representation that Products and Services will reduce any risk of property loss, product loss, loss of profit, pollution or personal injury or prolong the life of any equipment or other property; or that Products and Services will in all cases provide adequate warning and protection. You understand that Products if properly installed and maintained may only reduce the risk of property loss or other loss but Products and Services are not an insurance or a guarantee that there will be no property loss, product loss, loss of profit, pollution or personal injury or other loss as a result. **CONSEQUENTLY, HOT SHOT SYSTEMS SHALL HAVE NO LIABILITY FOR ANY POLLUTION, PRODUCT LOSS, LOSS OF PROFIT, PROPERTY DAMAGE, PERSONAL INJURY OR OTHER LOSS OR EXPENSES INCURRED BASED ON A CLAIM THE PRODUCTS AND SERVICES FAILED TO GIVE WARNING.**

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**15.21 INFORMATION to USER:**

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC License is not required. This device operates on frequencies authorized for use in the Multi-Use Radio Service (MURS). MURS frequencies are available for unlicensed business or personal use. Any changes or modifications may void the user's authority granted by the FCC to operate this radio and should not be made. Use of this radio outside the country where it was intended to be distributed is subject to government regulations and may be prohibited.

